


Mitex 30.80

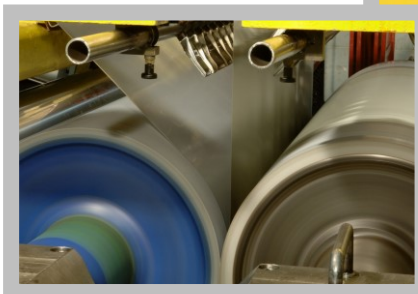

APPLICATIONS

- 🌐 Deflector Rolls
- 🌐 Bridle Rolls
- 🌐 Support Rolls
- 🌐 Lamination Roll Covers
- 🌐 S-Rolls

FEATURES AND BENEFITS

- 🌐 Very good release properties
- 🌐 Good mechanical properties against edge cutting
- 🌐 Applicable at continuous temperatures of up to 200°C
- 🌐 Tolerates linear pressure up to 40 N/mm
- 🌐 Free of extrusion and build lines
- 🌐 High thermal and electrical insulation
- 🌐 Electrically conductive Versions available

NOTES

Cleaning exclusively with soap lye or technical alcohol. For other hardnesses or finishes, please contact our sales staff or technical service.

This information and our technical advice – whether verbal, in writing or by way of trials – is given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to check its validity and to test our products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control, and therefore, entirely your own responsibility. Our products are sold in accordance with our General Conditions of Sales and Delivery.