




FEP und PFA Sleeves

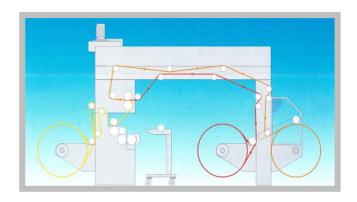

APPLICATIONS

- Roller coatings in adhesive laminating or lamination lines
- Coatings for pressure or counter rollers
- Applicator rollers

FEATURES AND BENEFITS

- Permanent connection between elastomer coating and FEP / PFA sleeves
- Peak temperature load capacity up to 220 °C
- Special surface properties offer extremely low adhesion
- Special surface averts adhesives etc. to stick
- FEP / PFA sleeves offer high resistance to aggressive chemicals
- Designed for high machine speeds and high line pressures
- The coating surfaces are easy to clean and wear-resistant
- Regrindable

NOTES

For other hardnesses or finishes, please contact our sales staff or our technical service.

This information and our technical advice – whether verbal, in writing or by way of trials – is given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to check its validity and to test our products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control, and therefore, entirely your own responsibility. Our products are sold in accordance with our General Conditions of Sales and Delivery.